


REVISIONS			
DESCRIPTIONS	BY	DATE	APPROVED

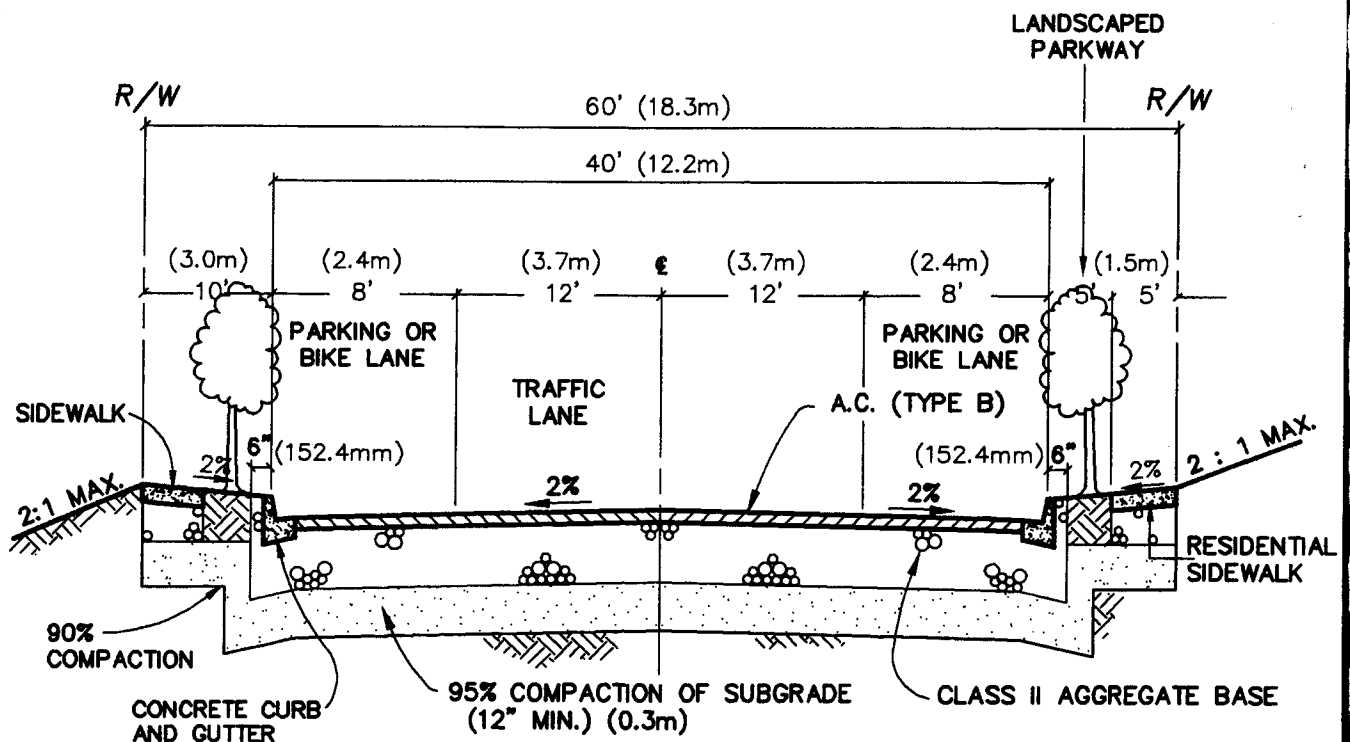

## CUL-DE-SAC AND LOCAL STREET

### LOCAL STREET

TRAFFIC INDEX: 5.0  
 DESIGN SPEED: 25.0 MPH  
 (40.3km per hour)

### CUL-DE-SAC STREET

TRAFFIC INDEX: 4.0  
 DESIGN SPEED: 25.0 MPH  
 (40.3km per hour)

#### NOTES:

1. SUBGRADE AND AGGREGATE BASE UNDER CURB, GUTTER, AND STREET IS TO BE COMPACTED AT 95%.
2. AREA UNDER SIDEWALK TO BE COMPACTED AT 90%.
3. ASPHALT CONCRETE TO BE USED SHALL BE TYPE "B" 3/4 INCH AR 8000. (2-INCH MINIMUM, COMPACTED AT 95%)
4. FINAL STREET STRUCTURE SECTION SHALL BE BASED ON "R" VALUE OBTAINED IN THE FIELD AND SHALL BE APPROVED BY THE CITY ENGINEER. HOWEVER, THE BASE THICKNESS SHALL BE 6 INCH MIN.
5. STREET TREES SHALL BE INSTALLED IN ACCORDANCE TO THE CITY STREET TREE ORDINANCE OR AS DIRECTED BY THE PLANNING COMMISSION.

DRAWN BY:  
C.A.C.  
 DESIGNED BY:

CITY OF PASO ROBLES  
 ENGINEERING DIVISION

DRAWING NO.

DATE:  
4/18/94  
 FILE NAME:  
PR-A-5.DWG

TYPICAL SECTION  
 LOCAL AND CUL-DE-SAC STREET

A-5